


REV	DESCRIPTION	DATE

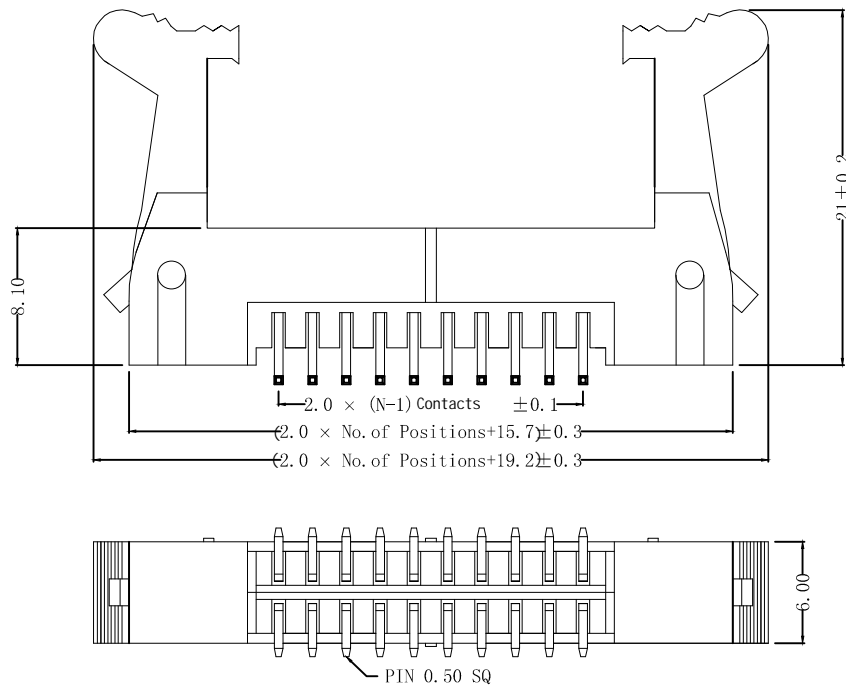


SPECIFICATIONS


Current Rating: 2.0 Amps  
 Insulator resistance: 1000MΩ Min.  
 Dielectric withstanding: AC 500V  
 Contact Resistance: 20 mΩ Max  
 Operating Temperature: -40° C - +105° C

MATERIALS


Contact Material: Copper Alloy  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon  
 Finish: Gold/Tin Plated over Nickle  
 All materials must meet RoHS requirements

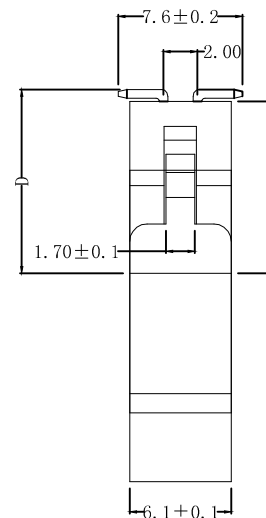

Ordering Information

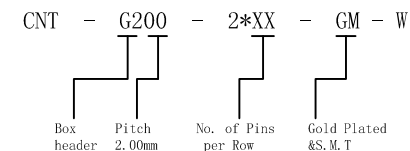

Recommended P.C. Board Hole Layout



A	E
B	F
H	W

<p><b>CNT</b> 肯耐特电子有限公司</p>				GENERAL TOLERANCE	DRAWN 董道丽	DATE 20190321	DWG. NO.	TITLE
				X.° ±5° X. ±0.30	CHECK 王芳芳	DATE 20190321	PART. NO.	
REV. 1.0	UNIT mm	SCALE 1:1		.X° ±3° .X ±0.38	APPROVE 王元中	DATE 20190321	CNT-G200-2*xx-GM	Pitch 2.0mm box header With Lock SMT
				.XX° ±2° .XX ±0.25				
				.XXX° ±1° .XXX ±0.15				