
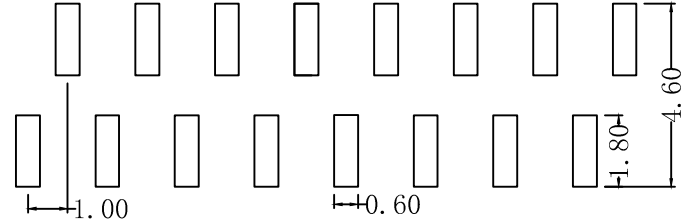

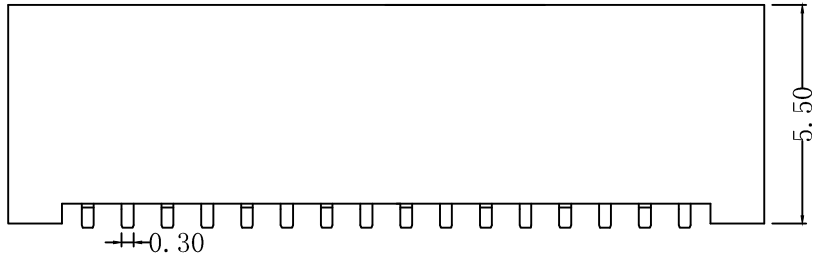


REV	DESCRIPTION	DATE

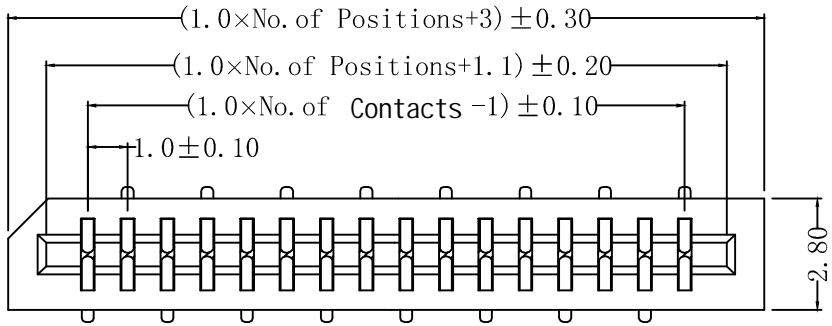

NOTE:

- MATERIAL
 - HOUSING: GLASS-REINFORCED THERMOPLASTIC UL 94V-0.
 - CONTACT: COPPER ALLOY.
 - PLATING: TIN PLATED OVER NICKEL.
- ELECTRICAL
 - CURRENT RATING: 1.0 AMP.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.
 - INSULATION RESISTANCE: 500MΩ MIN.
 - CONTACT RESISTANCE: 30mΩ MAX.
- ENVIRONMENTAL
 - TEMPERATURE RANGE: -25°C TO 85°C.
- PART NO.
 - CNT-FPC100-XX-TSM-D2-550

RECOMMENDED PCB LAYOUT

<p>CNT 肯耐特电子有限公司</p>				GENERAL TOLERANCE		DRAWN	董道丽	DATE	20191011	DWG. NO.	TITLE
				X.° ±5°	X. ±0.30	CHECK	王芳芳	DATE	20191011	PART. NO.	
REV.	UNIT	SCALE		.X° ±3°	.X ±0.38	APPROVE	王元中	DATE	20191011	CNT-FPC100-XX-TSM-D2-550	FPC 1.0 PITCH CONNECTOR TOP ENTRY DUAL SMT TYPE
1.0	mm	1:1		.XX° ±2°	.XX ±0.25						
				.XXX° ±1°	.XXX ±0.15						