
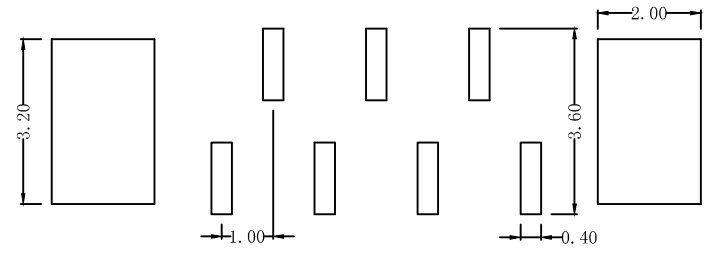

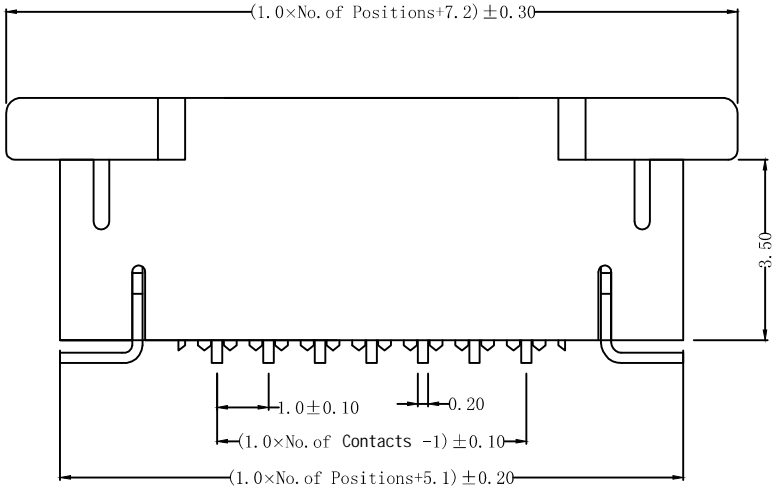


REV	DESCRIPTION	DATE

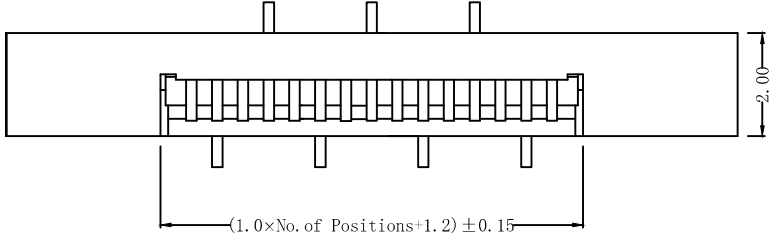

NOTE:

- MATERIAL
 HOUSING:HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
 ACTUATOR:HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
 CONTACT:PHOSPHOR BRONZE.
 PLATING:TIN OR GOLD PLATED OVER NICKEL.
 HOLDDOWN:BRASS. PLATING:TIN PLATED OVER NICKEL.
- ELECTRICAL
 CURRENT:0.5A MAX.
 DIELECTRIC WITHSTANDING VOLTAGE:250V AC MIN.
 CONTACT RESISTANCE:30mΩ MAX.
 INSULATION RESISTANCE:100MΩ MIN.
- ENVIRONMENTAL
 TEMPERATURE:-25°C TO +85°C
- PART NO.
 CNT-FPC100-XX-TSM-D11-350

RECOMMENDED PCB LAYOUT

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	董道丽	DATE	20191011	DWG. NO.	TITLE
				X.° ±5°	X. ±0.30	CHECK	王芳芳	DATE	20191011	PART. NO.	
REV.	UNIT	SCALE		.X° ±3°	.X ±0.38	APPROVE	王元中	DATE	20191011	CNT-FPC100-XX-TSM-D11-350	FPC PITCH 1.0mm 立式正脚位 SMT180°
1.0	mm	1:1		.XX° ±2°	.XX ±0.25						
				.XXX° ±1°	.XXX ±0.15						