
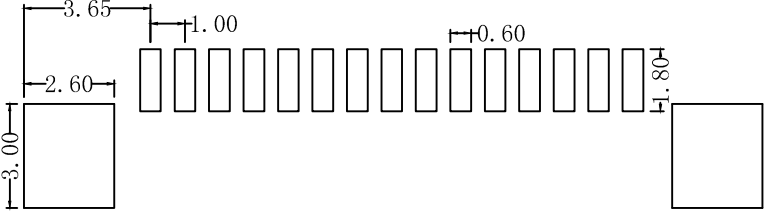

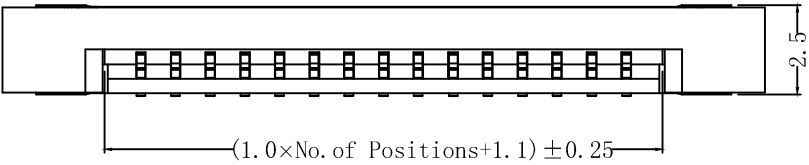


REV	DESCRIPTION	DATE

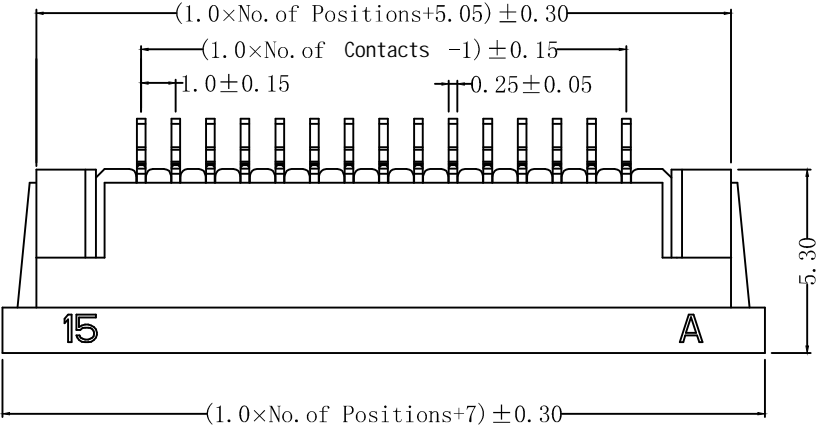

NOTE:

- **MATERIAL AND FINISH**
 HOUSING:HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
 ACTUATOR:HIGH-TEMP. THERMOPLASTIC. UL 94V-0.
 CONTACT:COPPER ALLOY.
 PLATING:TIN PLATED OVER NICKEL.
 HOLDDOWN:COPPER ALLOY. PLATING:TIN PLATED OVER NICKEL.
- **ELECTRICAL**
 CURRENT:0.5A MAX.
 DIELECTRIC WITHSTANDING VOLTAGE:250V AC MIN.
 CONTACT RESISTANCE:30mΩ MAX.
 INSULATION RESISTANCE:100MΩ MIN.
- **ENVIRONMENTAL**
 TEMPERATURE:-25°C TO +85°C
- **PART NO.**
 CNT-FPC100-XX-TDM-S1-21-250

RECOMMENDED PCB LAYOUT

CNT 肯耐特电子有限公司				GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	TITLE
				X.° ±5°	X. ±0.30	董道丽	20191011		
REV.	UNIT	SCALE	.X° ±3°		.X ±0.38	CHECK	DATE	PART. NO.	
1.0	mm	1:1	.XX° ±2°		.XX ±0.25	王芳芳	20191011	CNT-FPC100-XX-TDM-S1-21-250	
		.XXX° ±1°		.XXX ±0.15	王元中	20191011			

FPC 1.0 PITCH 单面上&下接平脚位 SMT90度